




SD-50 Super Distortion Pedal

174.213UK

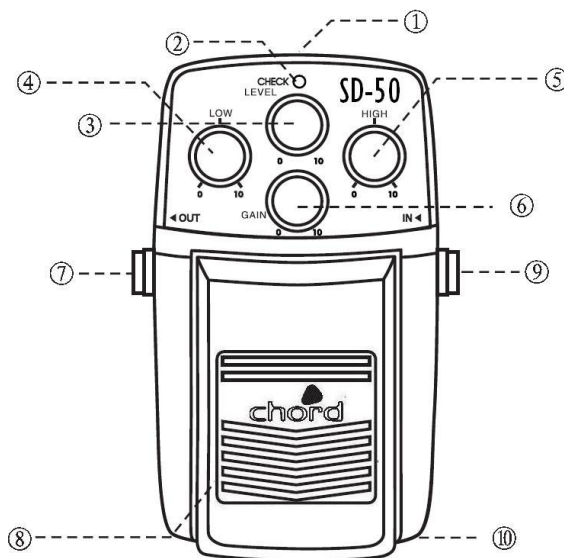

Functions

1. D.C. In – DC jack for optional mains adapter
2. Indicator LED – Shows when effect is on (when it appears dim, replace battery)
3. LEVEL – Adjusts the overall output level
4. LOW – Varies the low frequency content of the distorted sound
5. HIGH – Varies the high frequency content of the distorted sound
6. GAIN – Adjusts the amount of distortion and sustain given to the signal
7. Output – 6.3mm mono jack connector
8. Pedal Switch – Turns Effect On/Off
9. Input – 6.3mm mono jack connector
10. Battery housing – Compartment underneath for 9V battery

Notes on use

- Connecting to the Input jack enables the battery, please disconnect when not in use to preserve the battery
- Before connecting to an instrument, ensure amplifier volume is turned down

Specifications

- Input Impedance: 1M Ω
- Output Impedance: 1k Ω
- Residual Noise: 90dBu (IHF A, Typ)
- Power Supply: 9Vdc (battery or optional mains adapter) 17mA