

GM-313 / 313U INSTALLED BOUNDARY MICROPHONE

THE GM-313/313U BOUNDARY MICROPHONE ARE DESIGNED FOR TABLE, CEILING OR PANEL MOUNIED APPLICATIONS.


THEY ARE SUITABLE FOR SOUND PICKUP IN TELECONFERENCING, RECORDING AND OTHER PURPOSES. GM-313 IS WITH OMNI-DIRECTIONAL PATTERN AND GM-313U IS UNI-DIRECTIONAL PATTERN. BOTH ARE BACK ELECTRET CONDENSER ELEMENT WITH A WIDE, FLAT RESPONSE TO ACHIEVE A GOOD SOUND REINFORCEMENT.

WHEN USING GM-313U, ITS UNI-DIRECTIVITY CAN REDUCE AMBIENT NOISES AND ENHANCE A BETTER GAIN BEFORE FEEDBACK.



BOTH MODELS REQUIRE 9-52V DC PHANTOM POWER TO WORK, A LOW DISTORTION PRE-AMP BUILT INSIDE. BALANCED XLR OUTPUT.

SPECIFICATIONS:

TYPE -----	CONDENSER MICROPHONE
POLAR PATTERN -----	GM-313 OMNI-DIRECTIONAL GM-313U UNI-DIRECTIONAL
SENSITIVITY -----	GM-313 -76dB±3dB GM-313U -70dB±3dB
FREQUENCY RESPONSE -----	30~15KHz
MAXIMUM INPUT SOUND LEVEL -----	120dB SPL 1KHz at 1% T. H. D.
PHANTOM POWER REQUIREMENTS -----	9~52V
WEIGHT -----	160 g

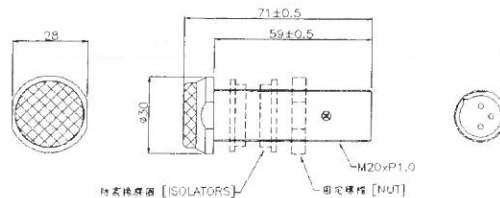

FREQUENCY RESPONSE

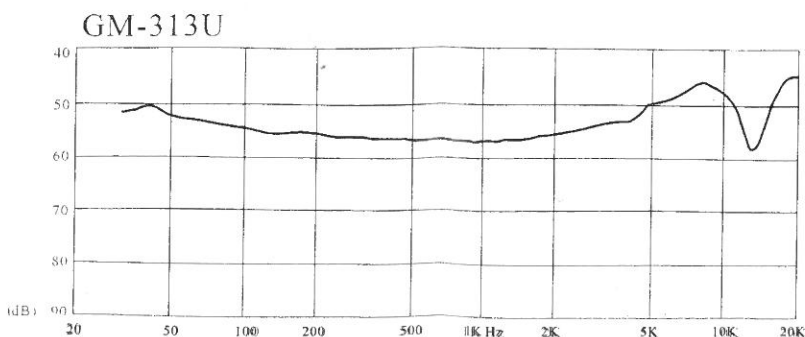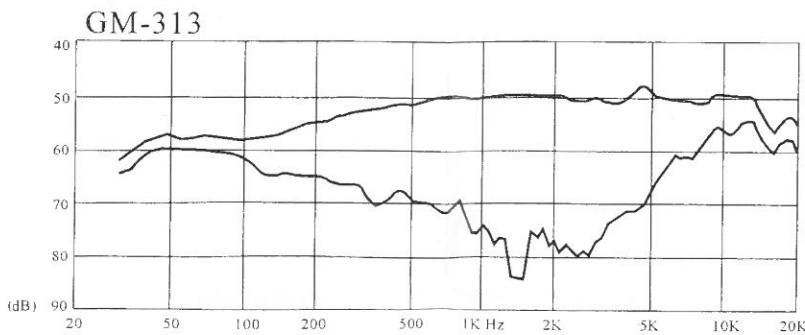

POLAR PATTERN

